



Specification

The full range consists of ready-made sections of steel wire from 1 to 10 meters with STL8x20 universal device with a safe working load (SWL):

25 kg


55 kg

85 kg

110 kg

Applications

- Cable trays
- Ducts and ventilation pipes
- Channels and lighting tracks
- Lamps
- Junction boxes

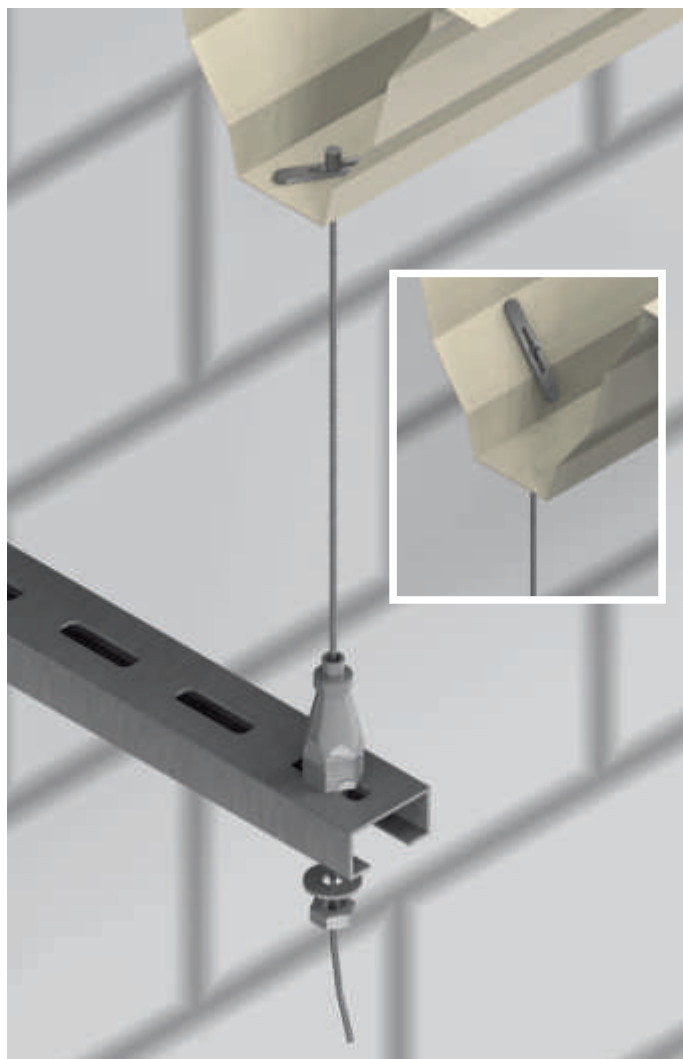

Type	Length m	SWL kg	Pack pcs
TG15-1M-STL8x20	1	25	10
TG15-2M-STL8x20	2	25	10
TG15-3M-STL8x20	3	25	10
TG15-4M-STL8x20	4	25	10
TG15-5M-STL8x20	5	25	10
TG15-6M-STL8x20	6	25	10
TG15-7M-STL8x20	7	25	10
TG15-8M-STL8x20	8	25	10
TG15-9M-STL8x20	9	25	10
TG15-10M-STL8x20	10	25	10
TG20-1M-STL8x20	1	55	10
TG20-2M-STL8x20	2	55	10
TG20-3M-STL8x20	3	55	10
TG20-4M-STL8x20	4	55	10
TG20-5M-STL8x20	5	55	10
TG20-6M-STL8x20	6	55	10
TG20-7M-STL8x20	7	55	10
TG20-8M-STL8x20	8	55	10
TG20-9M-STL8x20	9	55	10
TG20-10M-STL8x20	10	55	10
TG25-1M-STL8x20	1	85	10
TG25-2M-STL8x20	2	85	10
TG25-3M-STL8x20	3	85	10
TG25-4M-STL8x20	4	85	10
TG25-5M-STL8x20	5	85	10
TG25-10M-STL8x20	10	85	10
TG30-1M-STL8x20	1	115	10
TG30-2M-STL8x20	2	115	10
TG30-3M-STL8x20	3	115	10
TG30-4M-STL8x20	4	115	10
TG30-5M-STL8x20	5	115	10
TG30-10M-STL8x20	10	115	10

Other lengths also available upon request.

Available endings



Standard **4S** loop device.
Universal.



Stopper or loop type **KL**
device. Multifunctional.



STL 8x20 pass-through
device. M8 thread.



KV100 pass-through device.
Reversible.

Depending on the needs, we can choose various types of devices, differing in functionality and load capacity. What they have in common is quick assembly and smooth adjustment. All this makes the wires give us unlimited possibilities of attaching any suspension elements. If you do not know which one to choose, contact us, we will help you choose the optimal solution.